




Stadox Basislack Basecoat

- **Stadox MSB System**
- **Outstanding colour accuracy**
- **Outstanding filling properties**
- **Good opacity**
- **Easy to blend in**
- **Solid, metallic, pearl colours**

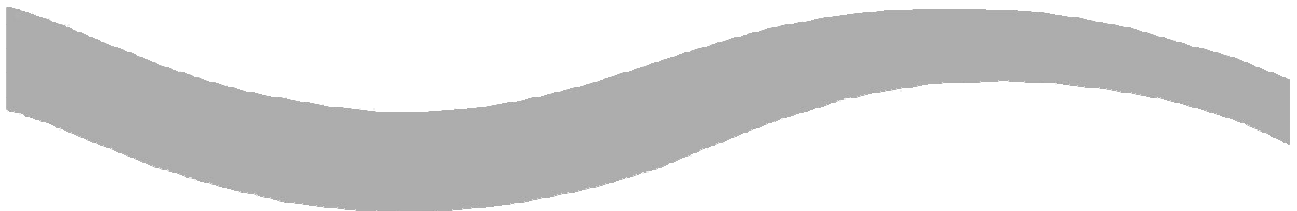

Technical Description:

- Mix with 50-60% Stadox Thinner MSB
- 2 Spray passes
- 10-15 min / 18-22°C

Stadox Basislack

Substrate:

- Through-hardened sanded paintwork
- Stadox 1K Primer
- Stadox 1K / 2K / VOC Filler
- Standohyd Filler

Pretreatment / Cleaning:




For substrate preparation information see Stadox Painting System S1.



Use air fed respirator. Refer to relevant Health and Safety Data Sheets.

Application:




50-60% Stadox Thinner MSB
20-22 s / DIN 4 mm / 20°C
53-61 s / ISO 4 mm / 20°C




Compliant 1.3 - 1.4 mm
2.0 - 2.5 bar inlet pressure
2 = 15 - 25 micron



HVLP 1.3 - 1.4 mm
0.7 bar atomization pressure
2 = 15 - 25 micron



5 min / 18-22°C
intermediate flash off



10-15 min / 18-22°C
final flash-off



Standocryl 2K / VOC Clears

Stadox Basislack

Flash point:

- 23 - 25°C / 73.4 - 77°F

Specific Gravity:

- 0.93 - 1.15 g/cm³

Solid Content

(without thinner added):

- 15.8 - 41.8 Weight %
- 11.9 - 23.7 Volume %

Theoretical Coverage:

- 7.1 - 8.9 m²/l at 25 micron dry film thickness

Cleaning of equipment:

Clean after use with Stadox Cleaning Thinner.

Important remarks:

- The masking of Stadox Basecoats is possible after 45-60 min/18-22°C or after oven drying. Hardened Stadox Basecoats should be masked only after oven drying.
- For special colours see technical data sheets.
- For Stadox Basecoat Real Black see technical data sheet 614.

MS System:

- For 3-stage plastic painting structured (Hard Plastics) (see Stadox Painting System S7.3) mix Stadox Basecoat with 20% Stadox 2K MS Hardener and 30-40% Stadox MSB Thinner (2 Spray passes). Drying: 20 min/60-65°C or 2 h/18-22°C
- For higher film thicknesses, above 40 micron (e.g. multi colour systems), mix Stadox Basecoat with 20% Stadox 2K MS Hardener and add 30-40% MSB Thinner. Allow longer flash off.

HS System:

- For 3-stage plastic painting structured (hard plastics) (see Stadox painting system S7.3) mix Stadox Basecoat with 15% Stadox 2K HS Hardener and 40% Stadox MSB Thinner (2 Spray passes). Drying: 20 min/60-65°C or 2 h/18-22°C
- For higher film thicknesses, above 40 micron (e.g. multi colour systems), mix Stadox Basecoat with 15% Stadox 2K HS Hardener and add 40% MSB Thinner. Allow longer flash off.

For professional use only. The information provided in this documentation has been carefully selected and arranged by us. It is based upon our best knowledge on the subject at the date of issuance. The Information is given for information purposes only. We are not liable for its correctness, accuracy and completeness. It is up to the user to check the information with regard to up-to-dateness and suitability for his intended purpose. The intellectual property in this Information, including patents, trademarks and copyrights, is protected. All rights reserved. The relevant Material Safety Data Sheet and Warnings displayed on the product label need to be observed. We may modify and/ or discontinue operation of all or portions of this Information at any time in our sole discretion, without notice and assume no responsibility to update the Information. All rules set forth in this clause shall apply accordingly for any future changes and amendments.